



Replacement LED backlights for
your PanelView 600 TOUCH (2711-T6)
CCFL
REPLACES SHARP LM6Q35 CCFL
BACKLIGHT

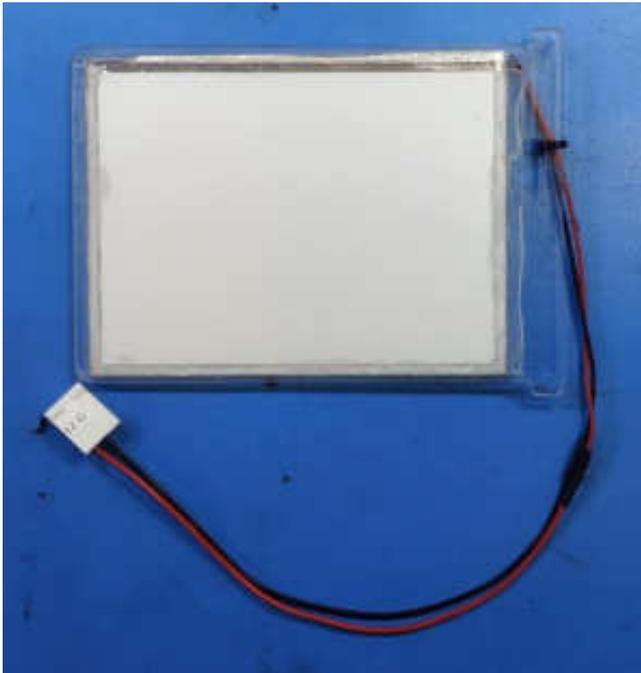

Original HMI of Allen-Bradley PanelView 600 2711-T6C8L1,
SER#A, REV#D

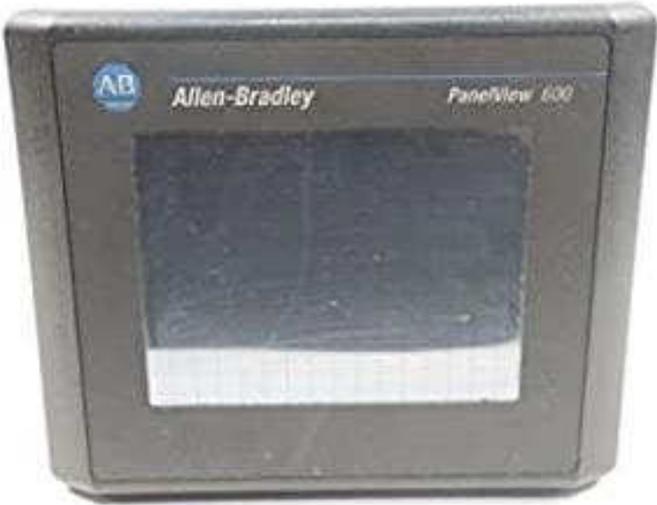


TAKE THE TERMINAL OUT OF YOUR MACHINE AND REMOVE THE 24 VDC FROM THE TERMINAL.


Remove back cover (4 screws)



UNSCREW THE SCREWS HOLDING THE POWER SUPPLY IN PLACE. REMOVE THE POWER SUPPLY.

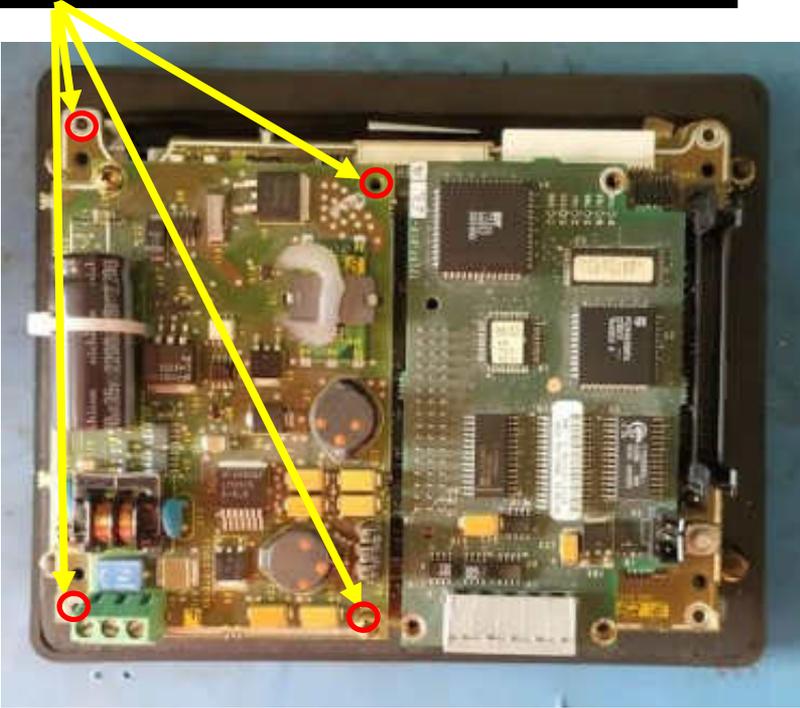

UNSCREW THE SCREWS HOLDING THE BOARDS IN PLACE.

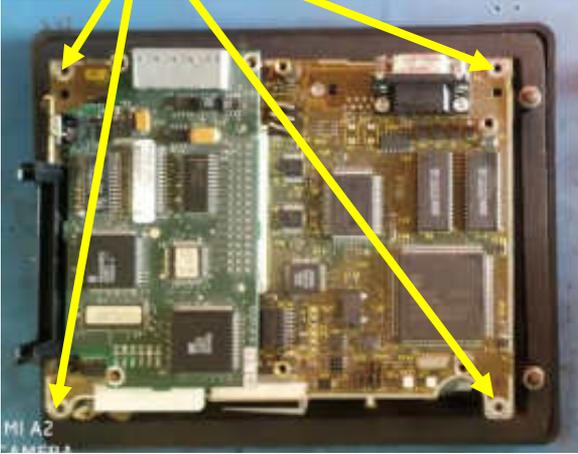

UNPLUG THE LCD RIBBON CABLE FROM THE BOARD.



UNSCREW THE LCD OUT OF THE BEZEL.



UNSCREW & UNPLUG THE BACKLIGHT ASSEMBLY TO TAKE IT OUT OF THE LCD.



GET THE MB600TLED OUT OF YOUR BOX.
SLIDE THE MONITECH LED INTO THE LCD.



SCREW IN THE LCD BACK INTO THE FRONT BEZEL.



PLUG IN THE LCD RIBBON CABLE INTO THE BOARD.



SCREW IN THE BOARD INTO THE FRAME.



FEED THE BACKLIGHT CONNECTOR AS SHOWN AND
CONNECT ONTO THE GOLD PINS AS SHOWN. MAKE SURE IT IS
PLUGGED IN THE RIGHT WAY. RED IS 12 VDC & BLACK IS GROUND



PLACE THE POWER SUPPLY BOARD BACK ONTO THE MAIN BOARD
AND SCREW IT IN.



SCREW IN THE BACK COVER. PUT THE 24 VDC AND 0 VDC INTO THE POWER CONNECTIONS FOR TEST.



NOW YOU CAN SEE !!!

Enjoy your rejuvenated Monitor.
Call us to order more HMI replacement parts.

Keep your AB PanelView's up and running!



Replacement: LCD's, Backlight's, Keypad's
& Touchscreen's for the whole 550 line.



Replacement: LCD's, Backlight's, Keypad's
& Touchscreen's for the whole 600 line.



Replacement: LCD's, Backlight's, Keypad's
& Touchscreen's for the whole 900 line.



Replacement: LCD's, Backlight's, Keypad's
& Touchscreen's for the whole 1000 line.



Replacement: CRT TO LCD
CONVERSION's, Backlight's, Keypad's &
Touchscreen's for the whole 1200 line.



Replacement: CRT TO LCD
CONVERSION's, Backlight's, Keypad's &
Touchscreen's for the whole 1400 line.

For Technical Support, Call
1-877-493-6105
Support@Monitech.com

MONITECH

PRACTICAL SOLUTIONS FOR INDUSTRIAL DISPLAYS

20 Howard Place

Kitchener, Ontario N2K 4Z4

CANADA 519.725.2222

www.monitech.com