



New LED backlight strips for PanelView 1000, 2711-NL7 Ser C & NL9 Ser D & E for Color





Original HMI of Allen-Bradley PanelView 1000

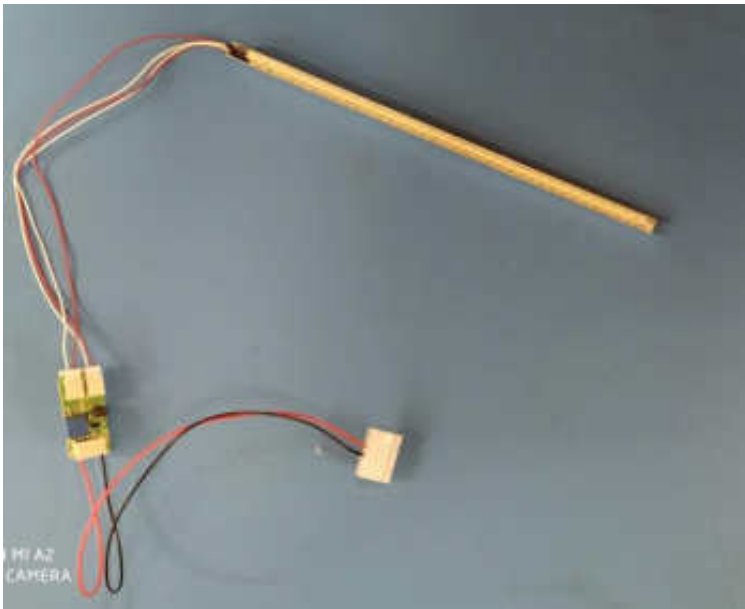

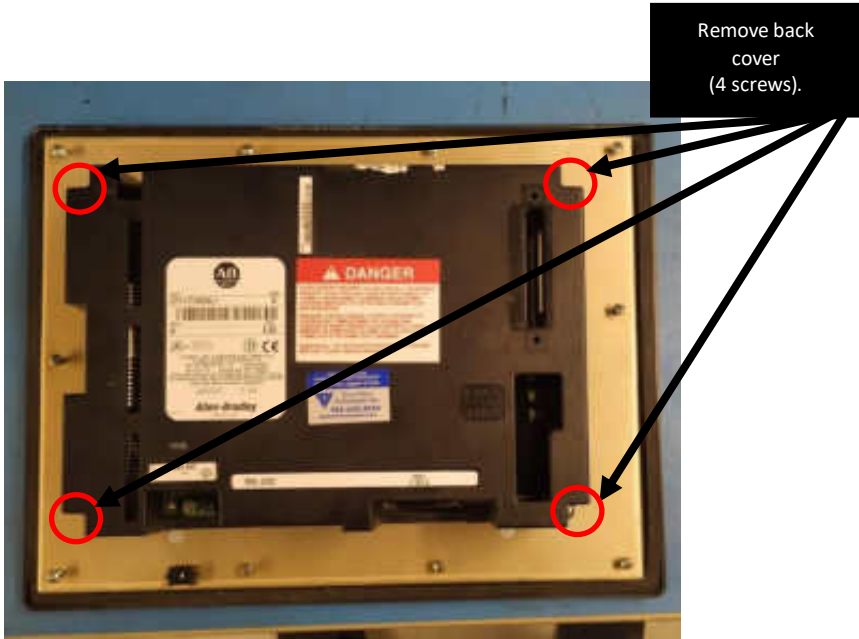


Unplug the 2 Ribbon cables.

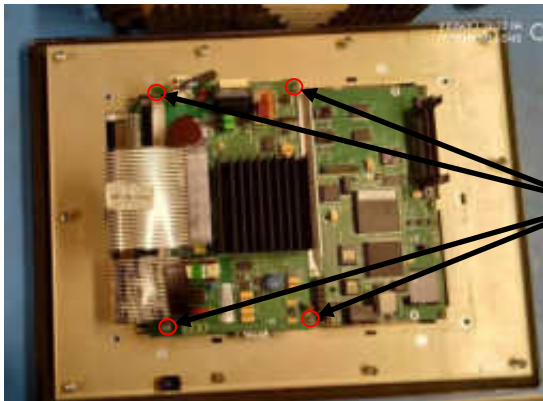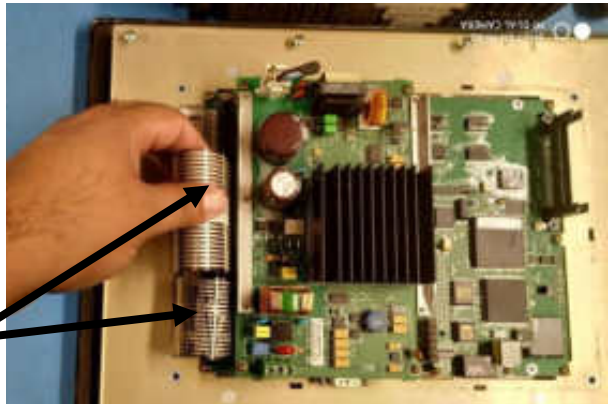


Unscrew the 4 screws holding the power supply board and remove it.

Identify 12 (12VDC) and G (ground).

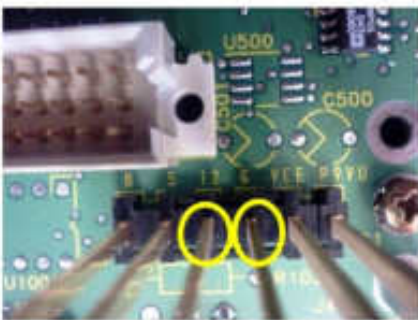

Attach **red** wire to **12** and **black** wire to **G**.


The white connector is easy to slide into the gold pins. Make sure red & black wire goes onto the 12 & G (Ground) gold pins.

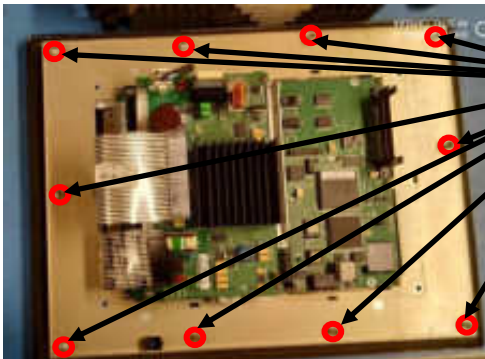


Unscrew the surrounding screws holding the board section in place. Also slide the backlight through the opening.



Unplug the old backlight connector. Slide the old backlight out of the LCD panel, you may need a small flat head screwdriver to unlock the backlight holder.

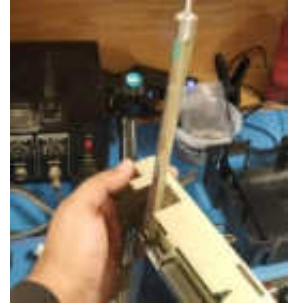


Slide in your Monitech Backlight replacement (MB1000LEDS) into the panel. Stick the inverter on the side of the panel as shown.

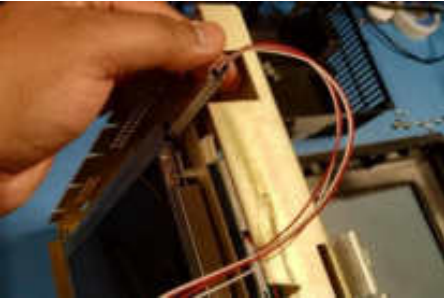


Now place the Assembly back on by sliding both ribbon cables through the hole and connecting them back into their respective connectors.



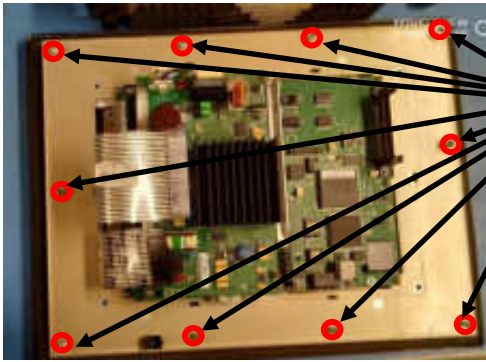

Screw the surrounding screws holding the board section in place.

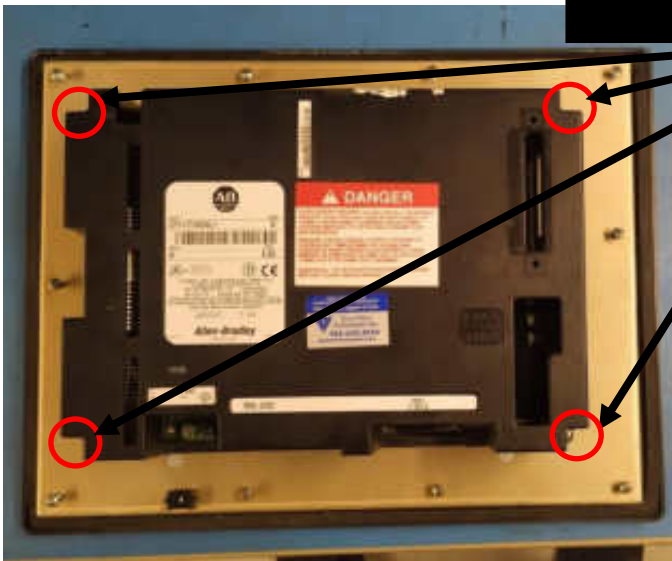

Screw in the 4 screws previously removed

Test the unit now by giving it power (110 -240 AC).

Now you can see!!!

Enjoy your rejuvenated Monitor.
Call us to order more HMI replacement parts.

Keep your AB PanelView's up and running!



Replacement: LCD's, Backlight's, Keypad's
& Touchscreen's for the whole 550 line.

Replacement: LCD's, Backlight's, Keypad's
& Touchscreen's for the whole 600 line.



Replacement: LCD's, Backlight's, Keypad's
& Touchscreen's for the whole 900 line.

Replacement: LCD's, Backlight's, Keypad's
& Touchscreen's for the whole 1000 line.



Replacement: CRT TO LCD
CONVERSION's, Backlight's, Keypad's &
Touchscreen's for the whole 1200 line.

Replacement: CRT TO LCD
CONVERSION's, Backlight's, Keypad's &
Touchscreen's for the whole 1400 line.

For Technical Support, Call
1-877-493-6105
Support@Monitech.com

MONITECH

20 Howard Place
Kitchener, Ontario N2K 4Z4
CANADA 519.725.2222
www.monitech.com